


Rating	Input: DC12~24V Output: DC 5V 2.1A+2.1A
Insulation Resistance	DC 500V 100MΩ Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-10°C~45°C

- *Short Circuit Protection
- *Polarity Protection
- *Overload Protection
- *Thermal Protection

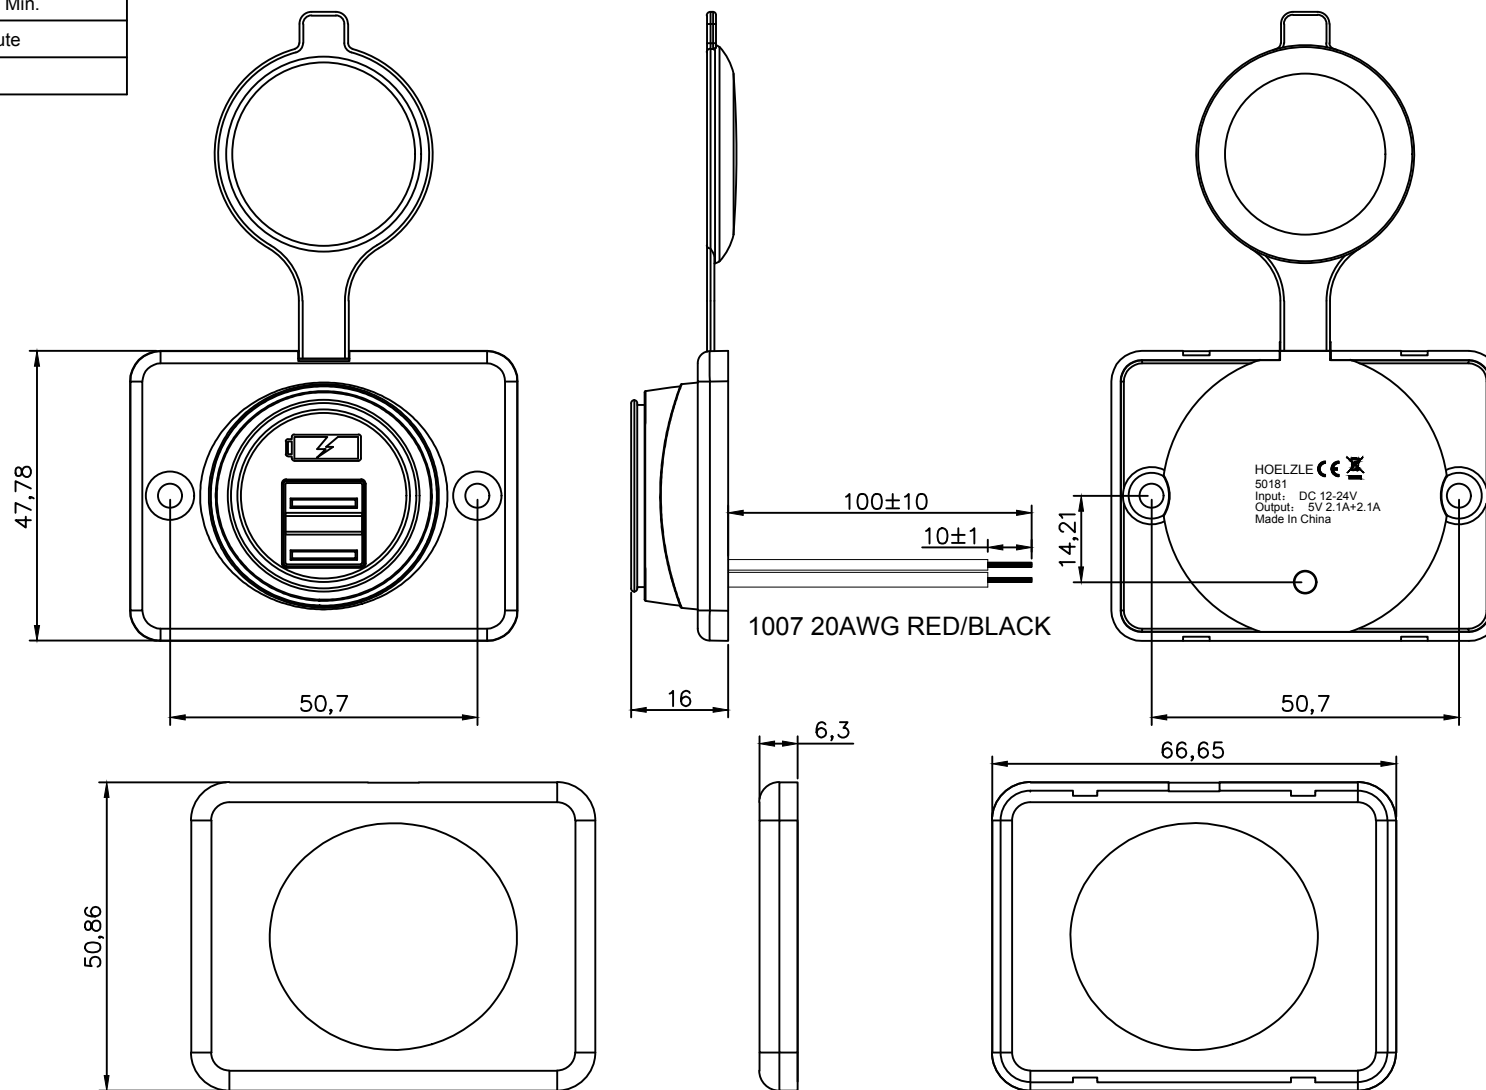

Housing: PA66+15%GF Black
Bottom cover: PA66+15%GF Black
Dust Cover: PVC Black

* Tolerances ±0.3 Unless Otherwise Specified

			△	Drawn	Checked	Approved	YM BOM No.		Model Name	USB Car charger	
			△	COCO			Customer No.		Model No.	50181	Rev.
Date	Name	Description	No.	09/11/18			Unit	mm			0