


Rating	Input: DC12~24V Output: DC 5V 4.2Amax
Insulation Resistance	DC 500V 100MΩ Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-10°C~45°C

Housing: PA66+15%GF Black
Bottom cover: PA66+15%GF Black
Dust Cover: PVC 80% Black

- *Short Circuit Protection
- *Polarity Protection
- *Overload Protection
- *Thermal Protection

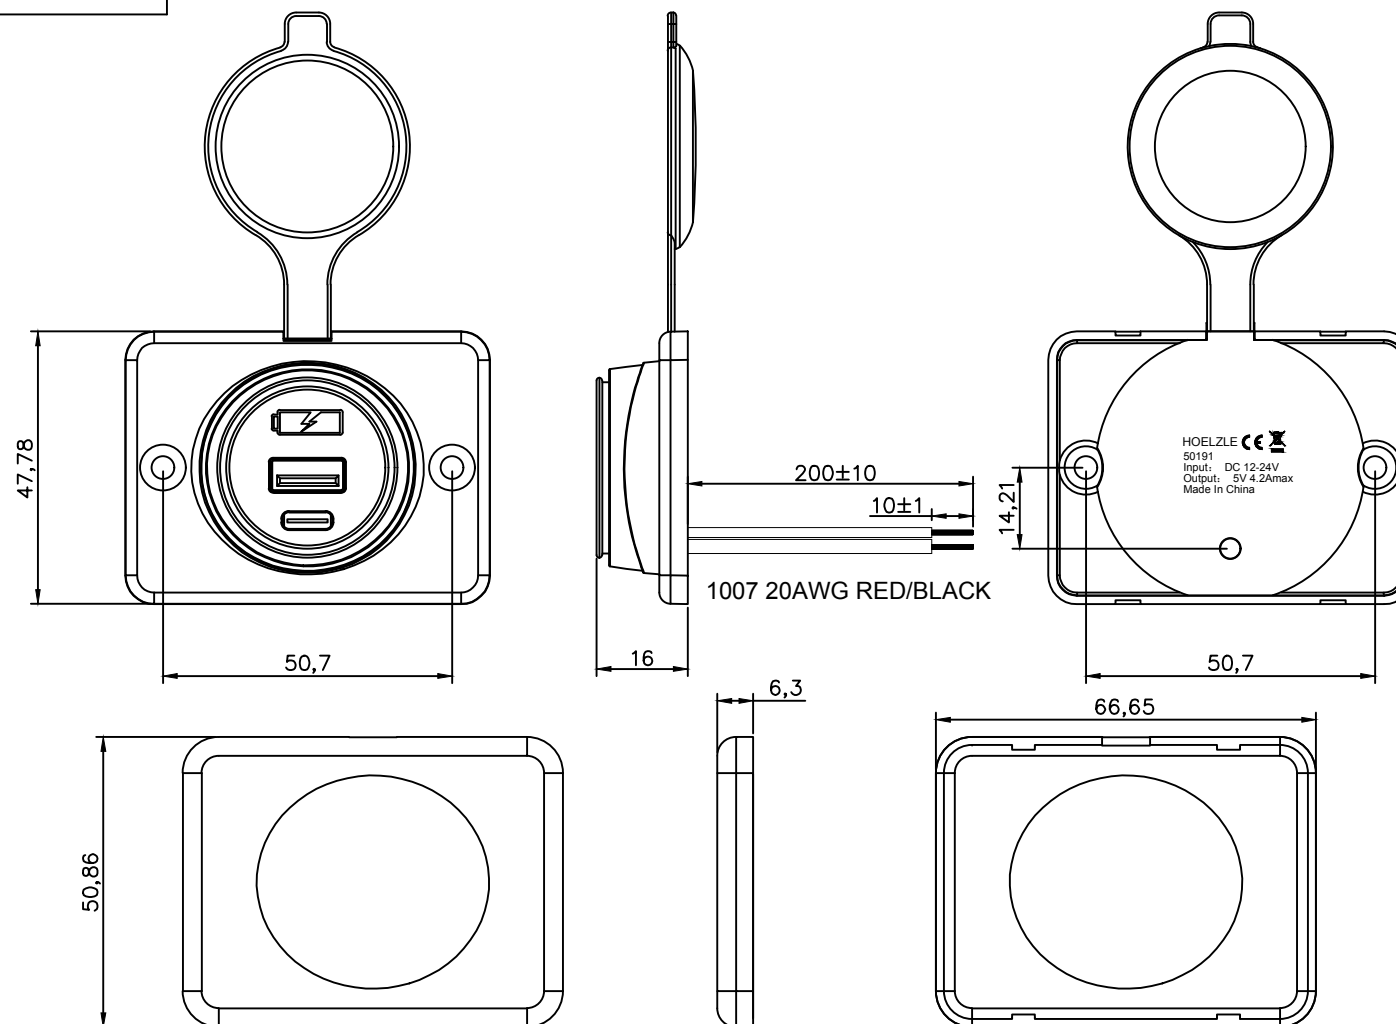

* Tolerances ±0.3 Unless Otherwise Specified

			△	Drawn	Checked	Approved	YM BOM No.		Model Name	USB Car charger		
			△	COCO			Customer No.		Model No.	50191	Rev.	0
Date	Name	Description	No.	05/28/20			Unit	mm				