

INTERRUTTORI GENERALI DI CORRENTE

150 A

BATTERY MAIN SWITCHES • BATTERIETRENNSCHALTER • INTERRUPTEURS GÉNÉRAUX DE COURANT

080802 00


Azionamento mediante pulsante
With push-button
Mit Druckknopf
Avec poignée



ARTICOLO - ITEM No. - ARTIKEL-Nr. - ARTICLE	080802 00
Tensione nominale - Nominal tension Nennspannung - Tension nominale	MAX 24 V
Corrente massima continua - Max. continuous operating current Max. Nennstrom bei Dauerbetrieb - Courant max. d'utilisation	150 A
Corrente massima di breve durata - Highest load Belastbarkeit - Courant max. pour courte durée	1200 A x 5 sec
Grado di protezione - Protection degree Schutzgrad - Degrée de protection	IP 65
Temperatura d'impiego - Operating temp. Betriebstemperatur - Temperature d'utilisation	- 30°C / + 60°C
Contatti - Terminals contacts Kontakte - Contacts	Rame argentato - Silver plated copper Versilbertes Kupfer - Cuivre argenté
Dadi per contatti - Nuts Mutter - Ecrous	M10


DISEGNI DIMENSIONALI

DIMENSIONS - ABMESSUNGEN - DIMENSIONS

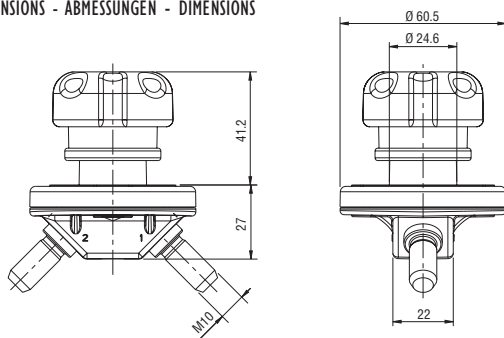


SCHEMA FORATURA PER FISSAGGIO

HOLES FOR FIXATION
BOHRUNGEN FÜR BEFESTIGUNG
TROUS POUR FIXATION



CURVA DI PORTATA

LOAD CURVE - BELASTUNGSKURVE - COUBRE DE PORTÉE

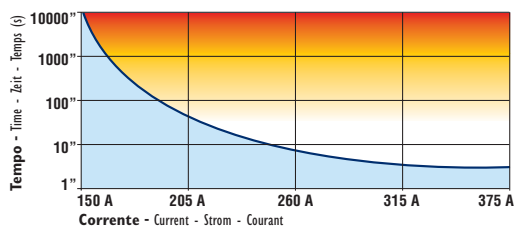

Con cavo sezione 70 mm² - With cable section 70 mm² - Mit Kabelquerschnitt 70 mm² - Avec câble de section 70 mm²

SCHEMA ELETTRICO

WIRING DIAGRAM
SCHALTSCHEMA
BRANCHEMENT

