


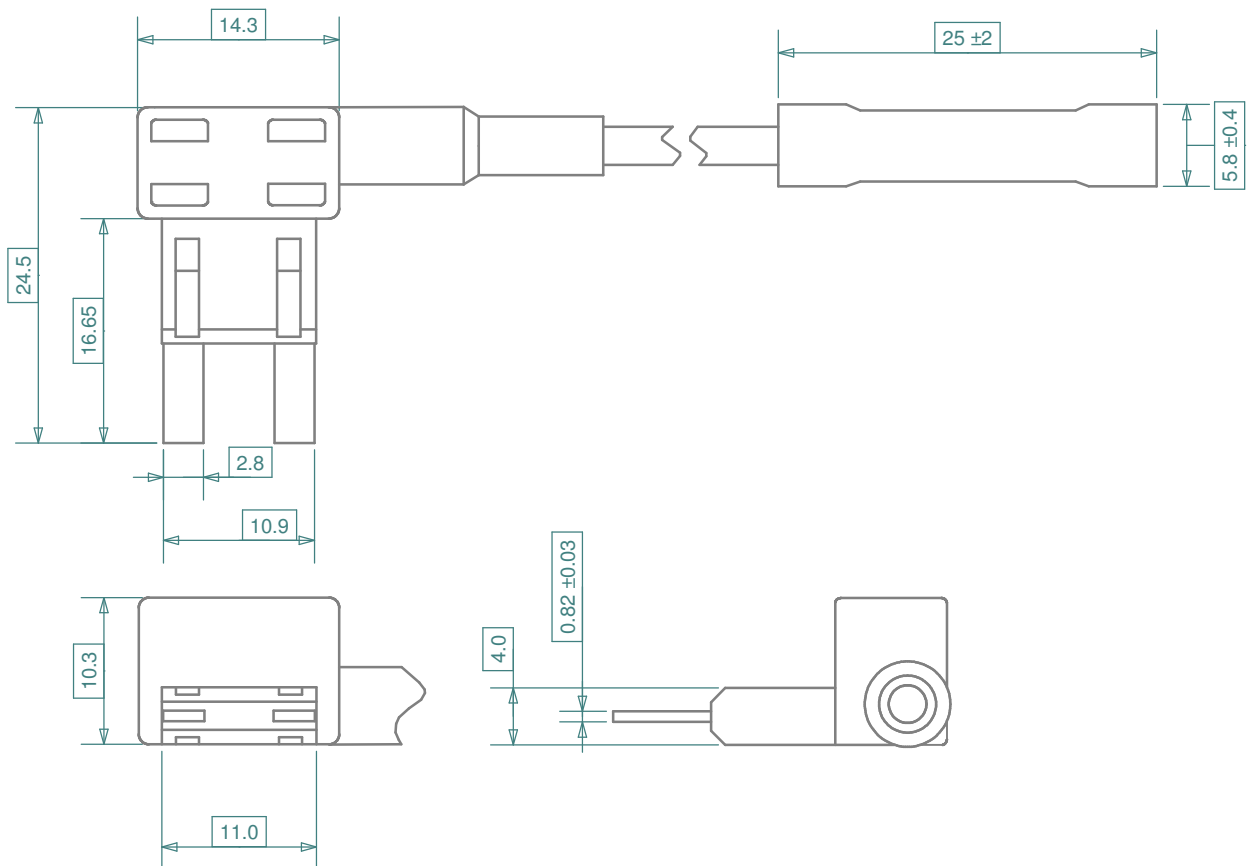


Notes and materials:

Body	Nylon PA66 UL 94V-0
Terminals	Brass, tin plated
Cable	12cm, 16 AWG (1.3mm ²) red wire
Connector	PVC butt connector, min. 15KG pull-out force
Current rating	Max. 15 Amp for additional circuit
Fuse series	F7000 series miniOTO fuse, see table

F7000 series miniOTO blade fuse ref. table:

Rating	Color	Volt	iMaXX Reference
[A]		[V]	
3	Violet	32	F7003
4	Pink	32	F7004
5	Tan	32	F7005
7.5	Brown	32	F7075
10	Red	32	F7010
15	Blue	32	F7015
20	Yellow	32	F7020
25	Natural	32	F7025
30	Green	32	F7030

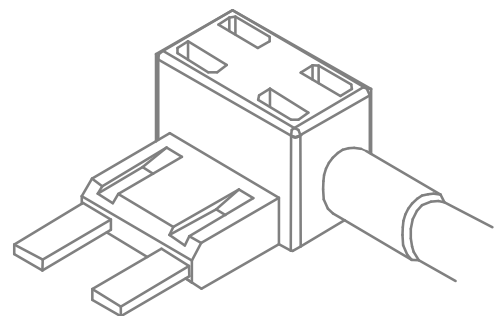

Revisions

Date	Type	Drawn	Date	Appr.
a 09/11	updated dimensions	Checked	01/09	GRH
b 05/13	updated tables	Standards	05/13	BE
		Approved	05/13	AdH



Scale

not to scale

Title

H7400 series, Circuit+ miniOTO fuse

Projection

Tolerance
± 0.2 mm unless
otherwise noted

Drawing type

schematic

Drawing number

H7400 drawing 1

Sheet

1 of 1

Layers / Sheet

0 1 2 6 9 11 Sheet 01

