


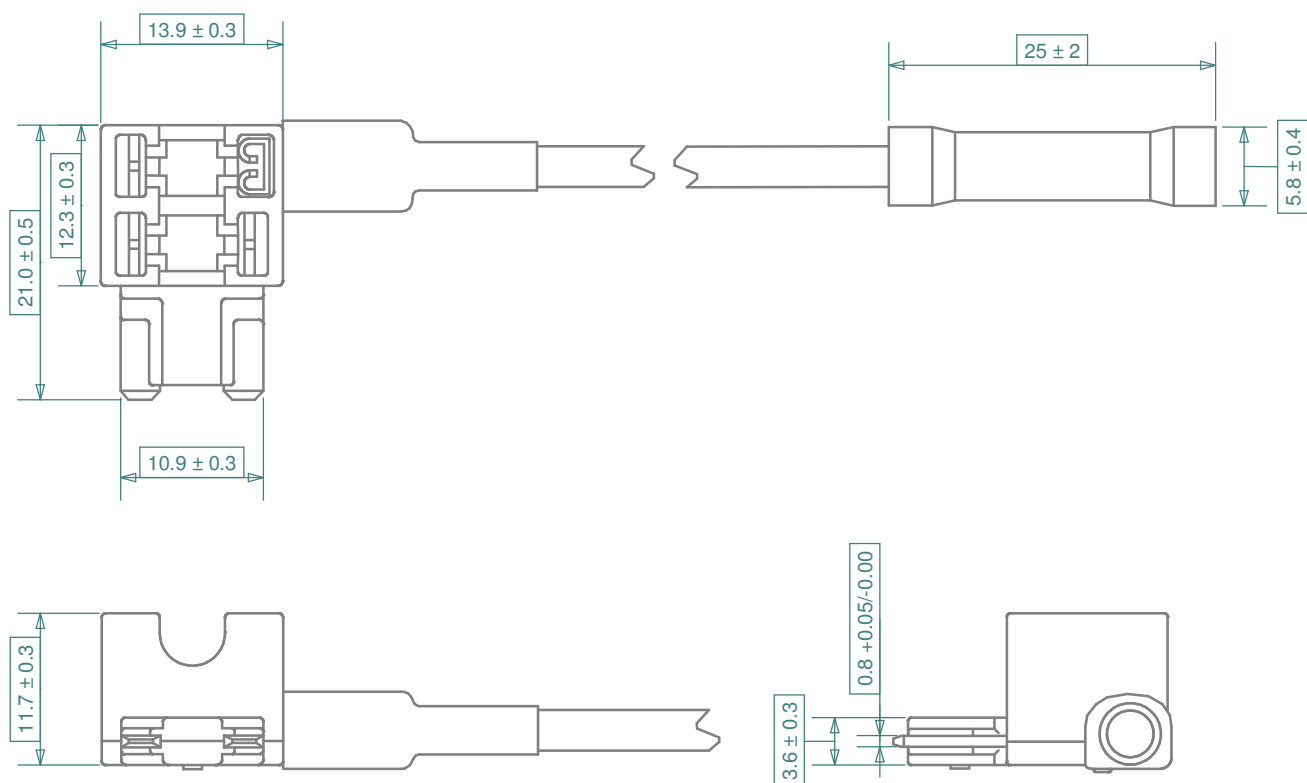


Notes and materials:

Body	Nylon PA66 UL 94V-0
Terminals	Brass, tin plated
Cable	12cm, 16 AWG (1.3mm ²) red wire
Connector	PVC butt connector, min. 15KG pull-out force
Current rating	Max. 10 Amp for additional circuit
Fuse series	FLP7000 series Low Profile miniOTO fuse, see table

FLP7000 series miniOTO Low Profile blade fuse ref. table:

Rating	Color	Volt	iMaXX Reference
[A]		[V]	
2	Gray	58	FLP7002
3	Violet	58	FLP7003
4	Pink	58	FLP7004
5	Tan	58	FLP7005
7.5	Brown	58	FLP7075
10	Red	58	FLP7010
15	Blue	58	FLP7015
20	Yellow	58	FLP7020
25	Natural	58	FLP7025
30	Green	58	FLP7030

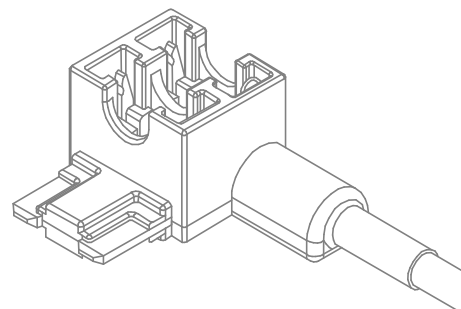

Revisions				Date	Appr.		
Date	Type		Drawn	05/13	GRH		
			Checked	05/13	BE		
			Standards				
			Approved	05/13	AdH		
			Scale	not to scale		Title	HLP7400 series, Circuit+ LP miniOTO fuse
			Projection	Tolerance ± 0.2 mm unless otherwise noted		Drawing type	schematic
						Drawing number	HLP7400 drawing 1
						Sheet	1 of 1
						Layers / Sheet	0 1 2 6 9 11 Sheet 01

