


REVISIONS

SYM DESCRIPTION DATE APPROVED

NC NEW RELEASE PER E.O. P19442 /-2-07 POR

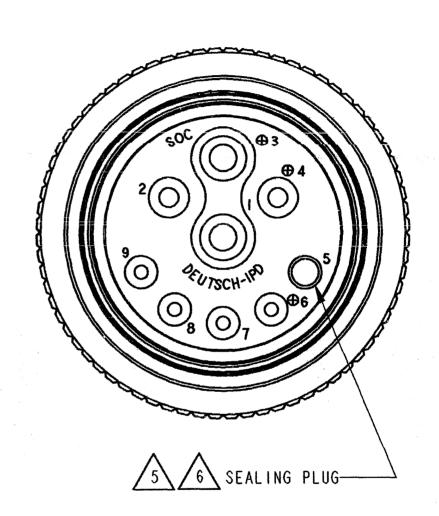

HDB36-24-915\*

7. THIS CONNECTOR MATES WITH HD34-24-91P\*-\*\*\*\*
(\* = SEAL TYPE, \*\*\*\* = ALL MODIFICATIONS) AND HDBOX24-91P\*.

6 CAVITY 5 IS WITH CONTACT SIZE 16 AND THE GROMMET IS SEALED.

5 CONTACTS 4 AND 5 ARE INTERNALLY CONNECTED. (BUILT-IN BRIDGE)

- 4. FOR CONTACTS AND WIRES PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DRAWING 0425-015-0000.
- 3. FOR PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DRAWING 0425-016-0000.
- 2. DIMENSIONS ARE IN INCHES [MILLIMETERS].
- NOTES:
- I. CONSULT THE FACTORY FOR ELECTRICAL AND MATERIAL SPECIFICATIONS.

- 9. BREAKAWAY FUNCTION OCCURS AT AN AXIAL LOAD OF 50 TO 100 LBS.
- 8. DIMENSION TOLERANCE IS  $\pm .025$  [.63] UNLESS OTHERWISE SPECIFIED.

	SIGNATURE & DATE	BREAKAWAY PLUG	EP	MATL. CODE
DR	A.MALAGON 28DEC06		Th	e Deutsch Company
СНК	B. Byford 2 JAN 07	24-91 ARR.	8	DEUTSCH I.P.D. 3850 INDUSTRIAL AVE.
PE	Seand 12.28.06	HDB SERIES	-	HEMET, CALIF. 92545
4000	$ $ $\eta$ $\eta$ $ $		B	HDB36-24-915*
APPD	VY./Keld 1-2-07			
SCALE	NONE WT-	ENVELOPE	DWG SIZE	CODE SHEET OF