# LED Work Lights - Model 660

### **PRODUCT INFORMATION**

**Description** 12-24V LED Work Light with Flood Beam

Pattern & Pedestal Mount

 Height
 121.92 mm / 4.8 in

 Width
 169.93 mm / 6.69 in

 Depth
 81.53 mm / 3.21 in

ShapeOvalOuter Lens MaterialGlassOuter Lens ColorClear

Housing Material Die-Cast Aluminum

Housing Color Black

**Mounting Hardware Description** (x1) M8-1.25 x 20mm Mounting Bolt

Mounting Type Universal Pedestal Mount

Minimum Operating -40 °C / -40 °F

**Temperature** 


**Maximum Operating**  $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$ 


**Temperature** 

Mating ConnectorPackard (#12059183)Product Weight1.53 lbs / 0.69 kgsShipping Weight2.69 lbs / 1.22 kgs



## **PRODUCT DIMENSIONS**

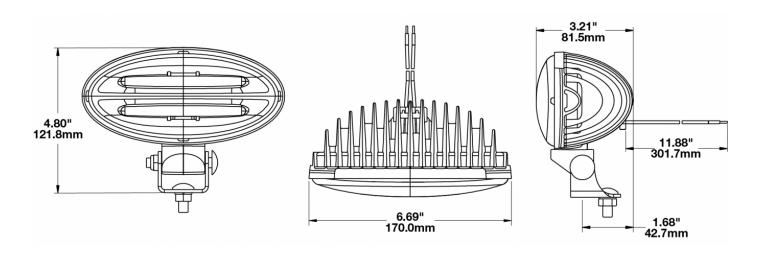





## LED Work Lights - Model 660

#### **ELECTRICAL SPECIFICATIONS**

Input Voltage12-24V DCOperating Voltage9-28V DC

**Transient Spike Protection** 150V Peak @ 1 HZ-100 Pulses

Red WirePositiveBlack WireNegativeCurrent Draw2.0A @ 12V DC

1.0A @ 24V DC

#### REGULATORY STANDARDS COMPLIANCE







Buy America Standards IEC IP69K Eco Friendly

#### PHOTOMETRIC SPECIFICATIONS


**Raw Lumen Output** 2,750 **Effective Lumen** 2,200

Output

Nominal LED Color 5000 K

Temperature

**Beam Pattern(s)** Forward Lighting - Flood (Standard)

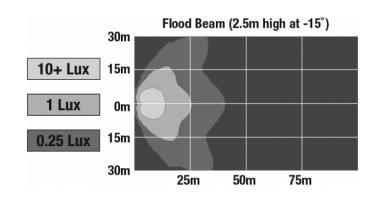



# LED Work Lights - Model 660

## **APPLICATIONS**















### **PRODUCT WARNINGS**

For California residents:

▲ **WARNING:** Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

#### **RELATED PRODUCTS**



Part Number 0548521

12-24V LED Work Light with Flood Beam Pattern & Panel Mount

