


32A 240/415V AC	
L1 (1)	6 mm ²
L2 (2)	6 mm ²
L3 (3)	6 mm ²
N (4)	6 mm ²
PE (5)	6 mm ²
CP (6)	0.5 mm ²
PP (7)	0.5 mm ²

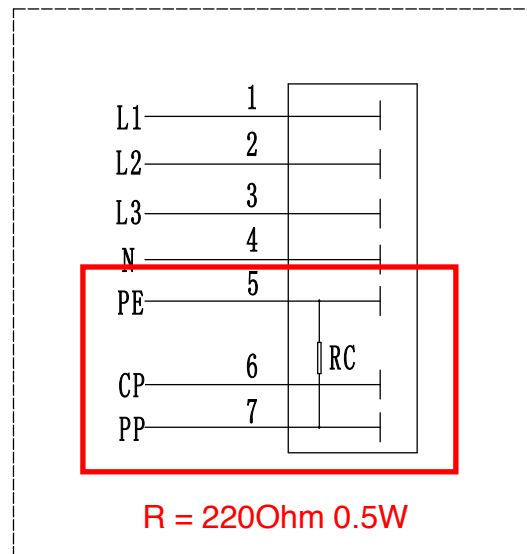

220 Ohm Widerstand zur Codierung des Steckers (32 A) muss zwischen den Kontakten PE und PP angeschlossen werden.