

圖號 DRAWING No. :FP3DR-25NB-0

校訂版次 REVISIONS

品名 NAME:Ring

ITEM No. :

版次	記述 DESCRIPTION	DATE	核可


MAXIMUM ELECTRIC CURRENT

A. W. G	4
MAX AMP	125

NOTE: DIN 46234

- 1. BRAZED SEAM
- 2. WIRE RANGE:4 AWG / 25 mm<sup>2</sup>
- 3. MATERIAL THICKNESS:t  
TOLERANC:±0.05

WIRE RANGE AWG/mm <sup>2</sup>	產品編號 ITEM NO.	d2 ±0.40	B ±0.40	F ±0.80	L ±1.50	E ±0.80	D ±0.40	d1 ±0.60	t
4 A. W. G. 25 mm <sup>2</sup>	DIN 5-25B	5.3	12.0	25.0	31.0	11.0	10.8	7.5	1.5
	DIN 6-25B	6.5	12.0	25.0	31.0				
	DIN 8-25B	8.4	16.0	25.0	33.0				
	DIN 10-25B	10.5	18.0	26.0	35.0				
	DIN 12-25B	13.0	22.0	31.0	42.0				
	DIN 16-25B	17.0	28.0	35.0	49.0				

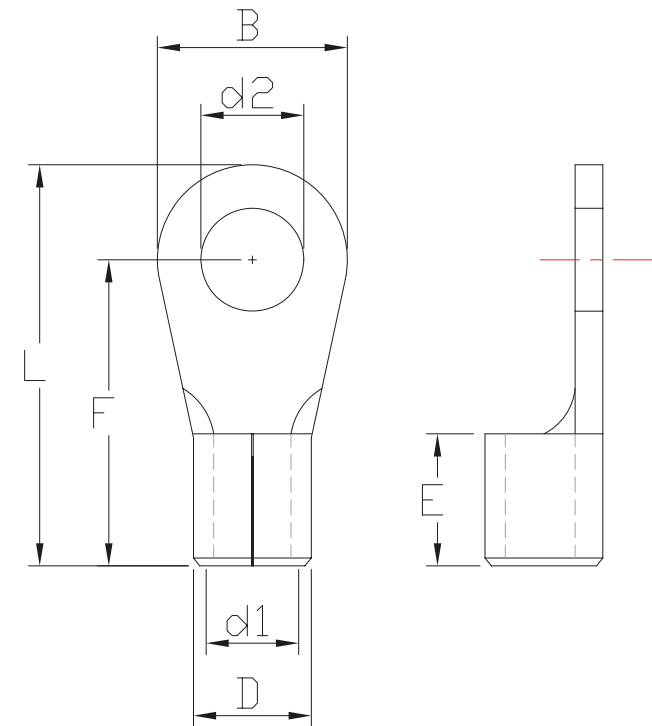

認可 APPROVALS

第三視角  
THIRD VIEW

MATERIAL

單位UNIT

製圖 DRAFT: TINA

INSULATION:NON

m/m

設計 DESIGN: KEN

MATERIAL:COPPER

比例SCALE

核可 CHECKED: ANDY

TIN PLATING

日期 DATE:2015.01.05

