


RoHS Compliant

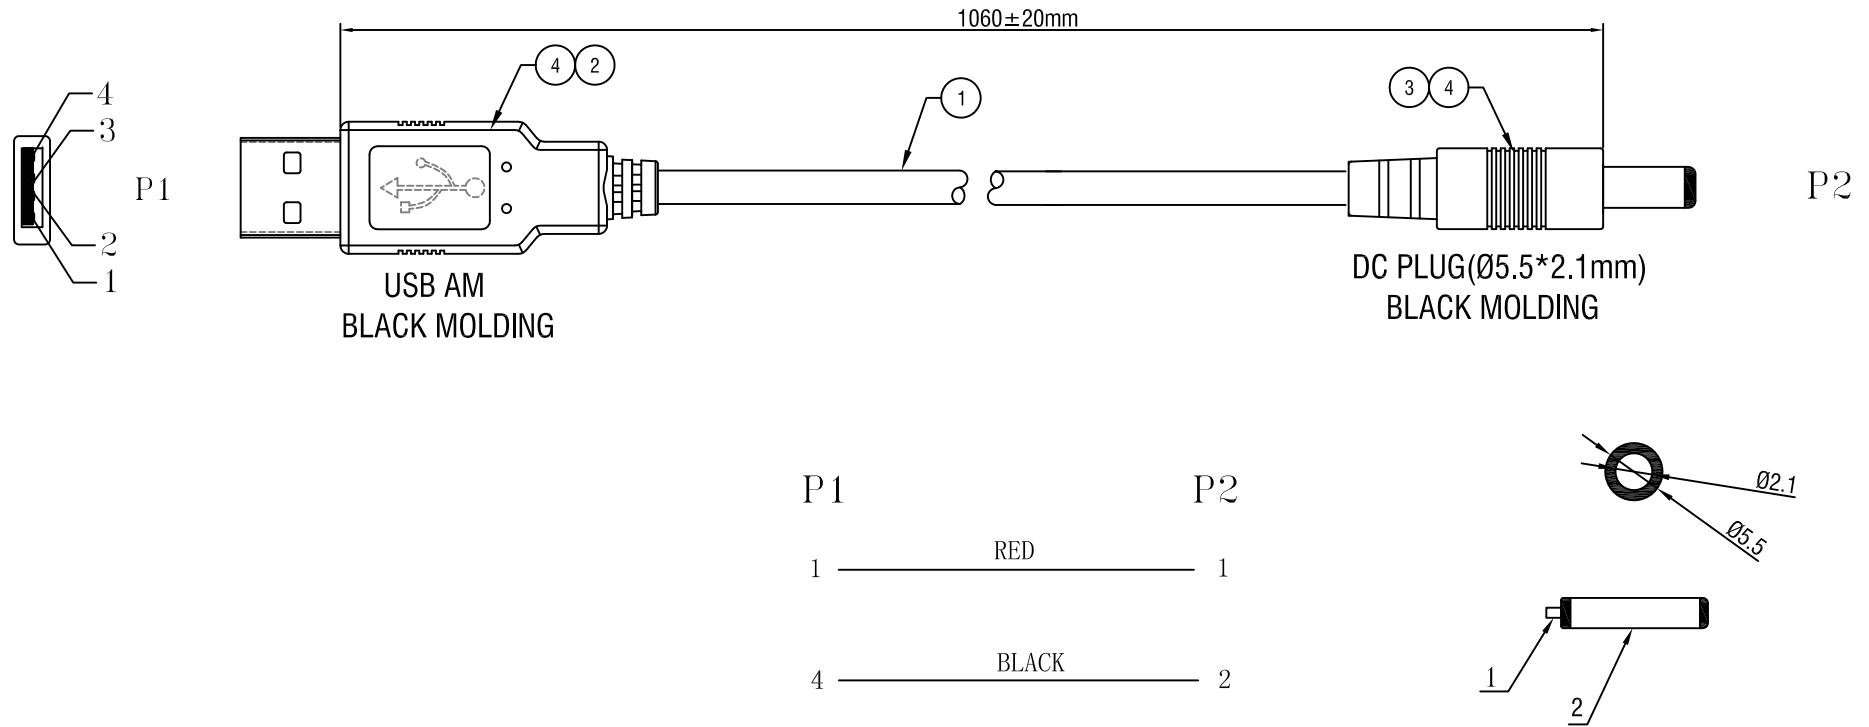

Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE
- 2.CONTACT RESISTANCE:3Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-PORT:300V DC/10MS

4	45P PVC BLACK		G
3	DC PLUG Ø5.5*2.1mm (BLACK INSULATOR NICKEL PLATED)		G
2	USB 2.0 AM (WHITE INSULATOR NICKEL PLATED)	1	PCS
1	UL2725 28#*2C OD:3.5mm BLACK COLOR PVC JACKET	1	PCS
NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit

D		
C		
B	Revise the length to end to end	2015-12-16
VER.A	REVISE	DATE
Item		1359888
Draw	Andi	Date: 2015.05.19
Approval		
Duty	F16/F46	
Sample NO.	Drawings of 1 (1)	Proportion: 1:1 Unit(mm)