

圖號 DRAWING No. :FP3DR-16NB-0

校訂版次 REVISIONS

品名 NAME:Ring

ITEM No. :

版次	記述 DESCRIPTION	DATE	核可


MAXIMUM ELECTRIC CURRENT

A. W. G	6
MAX AMP	95

NOTE: DIN 46234

1. BRAZED SEAM
2. WIRE RANGE:6 AWG / 16 mm²
3. MATERIAL THICKNESS:t
TOLERANC:±0.05

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	d2 ±0.40	B ±0.40	F ±0.80	L ±1.50	E ±0.80	D ±0.30	d1 ±0.30	t
6 A. W. G. 16 mm ²	DIN 5-16B	5.3	11.0	20.0	25.5	10.0	8.5	5.8	1.2
	DIN 6-16B	6.5	11.0	20.0	25.5				
	DIN 8-16B	8.4	14.0	22.0	29.0				
	DIN 10-16B	10.5	18.0	24.0	33.0				
	DIN 12-16B	13.0	22.0	26.0	37.0				

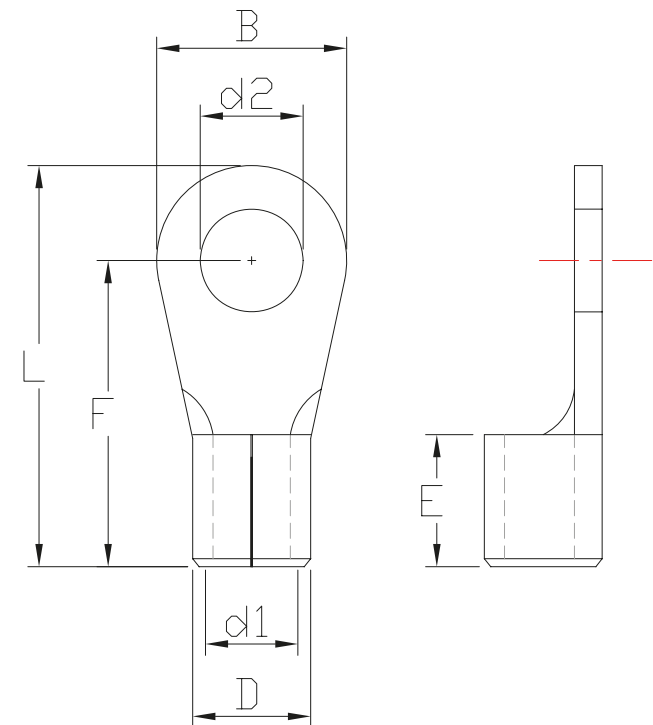

認可 APPROVALS

第三視角
THIRD VIEW

MATERIAL

單位UNIT

製圖 DRAFT: TINA

INSULATION:NON

m/m

設計 DESIGN: KEN

MATERIAL:COPPER

比例SCALE

核可 CHECKED: ANDY

TIN PLATING

日期 DATE:2015.01.05

